


5 OPL-HI

○OPL-HIについて

従来のL型擁壁、特に高さ3.0mをこえるものについては製品化があまり進んでいない状況の中、当社では新たに、高さ3.20mから6.10mまでの擁壁を開発いたしました。

OPL-HI H=3200~6100 基本寸法図

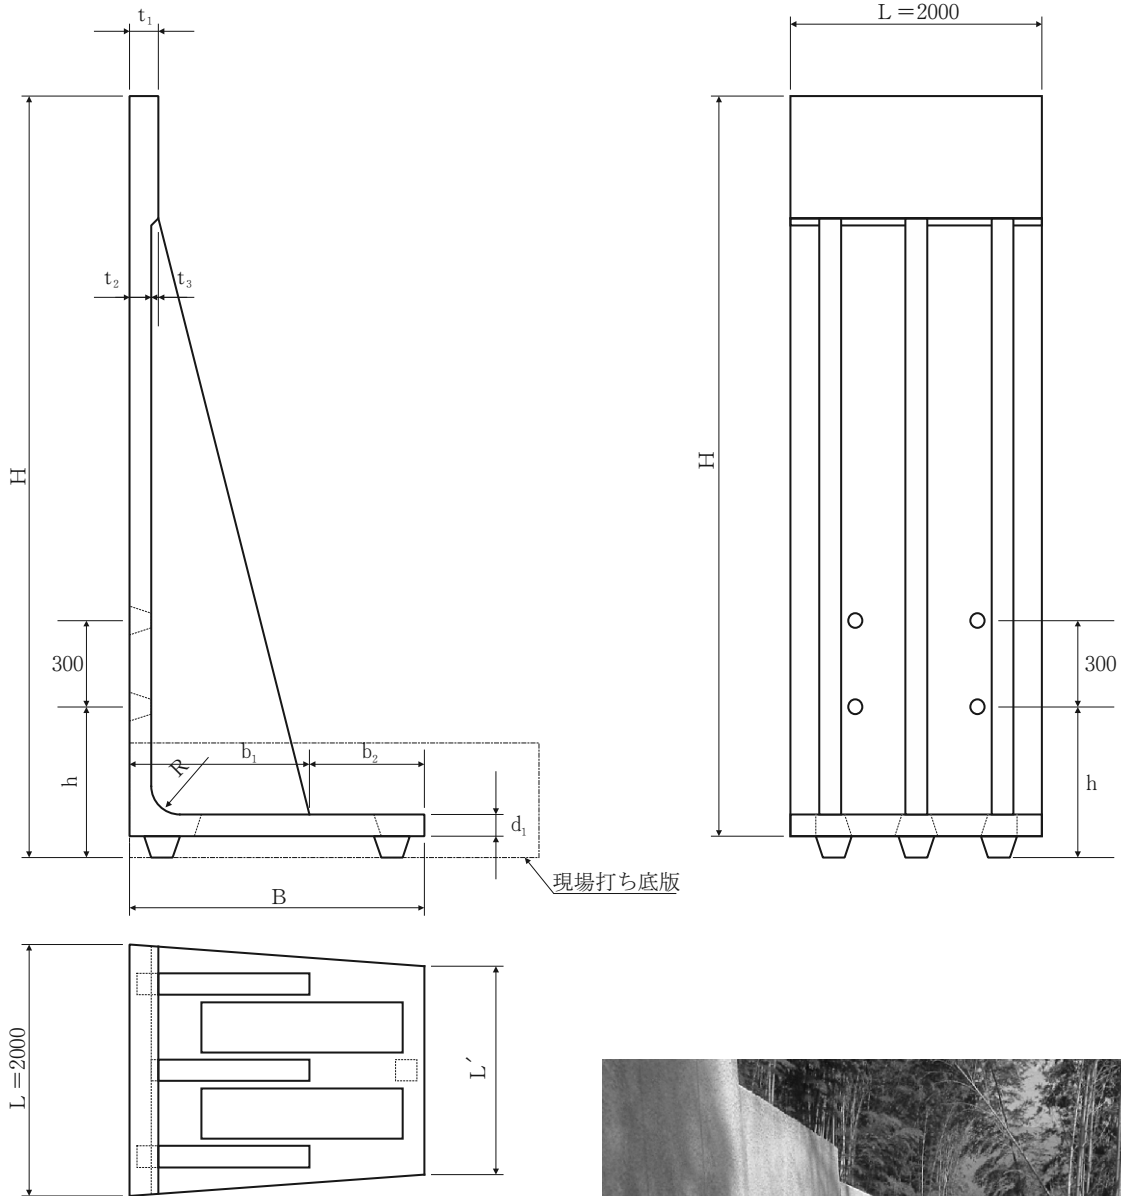

現場打ち底版



奈義町役場（小谷線）



奈義町役場（小谷線）

呼び名	参考質量 (kg)	単 価 (円)	寸 法 (mm)												
			H	h	B	t ₁	t ₂	t ₃	d ₁	b ₁	b ₂	L	L'	R	
3200	3,917		3200	800	1600			120	80	120	920	680		1793	250
3250	3,966		3250												
3300	4,016		3300												
3400	4,115		3400												
3500	4,214		3500												
3600	4,313		3600												
3700	4,412		3700												
3750	4,462		3750												
3800	4,511		3800												
3900	4,610		3900												
4000	4,710		4000												
4100	4,809		4100												
4200	6,445		4200	950	2000	200	130	70	130	1168	832	2000	1738	300	
4250	6,494		4250												
4300	6,544		4300												
4400	6,643		4400												
4500	6,742		4500												
4600	6,842		4600												
4700	6,941		4700												
4750	6,990		4750												
4800	7,040		4800												
4900	7,139		4900												
5000	7,238		5000												
5100	7,337		5100												
5200	9,313		5200	1000	2400			140	60	140	1415	985		1684	300
5250	9,364		5250												
5300	9,415		5300												
5400	9,517		5400												
5500	9,620		5500												
5600	9,722		5600												
5700	9,825		5700												
5750	9,876		5750												
5800	9,927		5800												
5900	10,030		5900												
6000	10,132		6000												
6100	10,235		6100												

製品質量が2t以上の製品につきましては車上渡しとなります。

H=3200~6100の製品につきましては、底版部を現場打ちする構造になっておりますのでお問い合わせ下さい。